




凯煌阀门
MANUFACTURER OF VALVES

德标Y型过滤器
DIN Y-STRAINER
DIN PN16-PN25-PN40

产品标准
standard features

- **产品描述** BOLTED COVER
Description REPLACEABLE SCREEN
- **设计标准** DIN 3352
Design DIN 3840
- **结构长度标准** EN 558-1
Face to face
- **法兰标准** EN1092-B1
Flanges
- **对焊连接标准** EN12627 AND DIN 3239
Butt welded
- **检验标准** EN 12266
Testing
- **等级标准** DIN 2401
Rating
- **标识标准** EN 19
Marking CE - PED
- **证书标准** EN 10204 – 3.1
Certificates

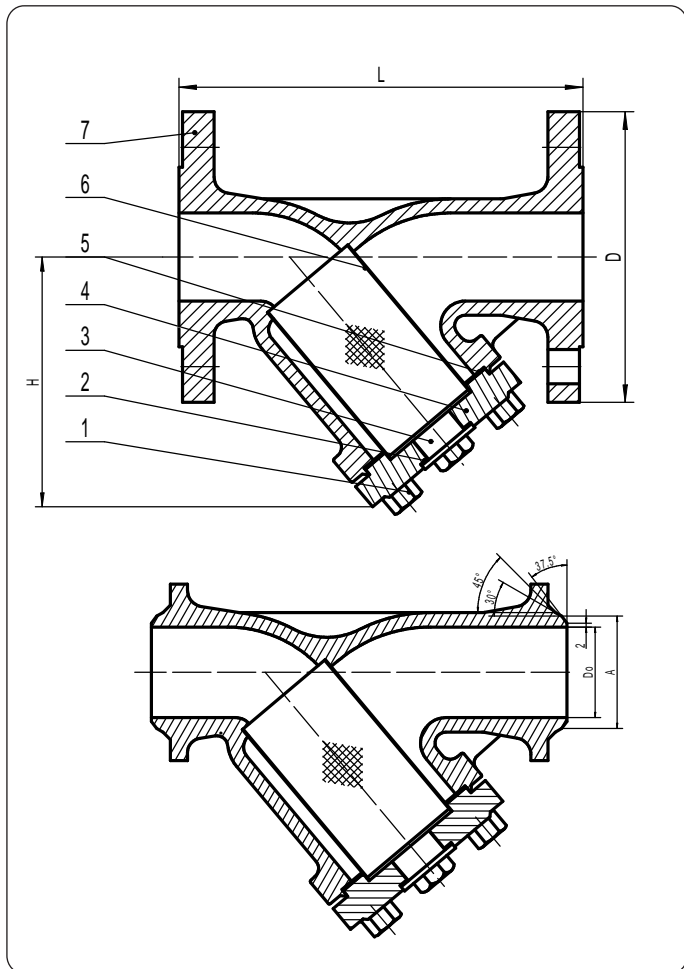

| 零件名称 / PART NAME | 材质 / MATERIAL | | |
|--------------------|----------------------------|----------------------------|----------------------------|
| 1 螺栓 / Bolts | A193 B7 | A193 B8 | A193 B8M |
| 2 垫片 / Gasket | Cu Alloy/铜合金(1) | Cu Alloy/铜合金(1) | Cu Alloy/铜合金(1) |
| 3 排污塞 / Drain plug | 1.0460(A105) | 1.4301(F304) | 1.4401(F316) |
| 4 阀盖 / Cover | 1.0460(A105) | 1.4301(F304) | 1.4401(F316) |
| 5 复合垫 / Gasket | S.S.+graphite/S.S.+柔性石墨(2) | S.S.+graphite/S.S.+柔性石墨(2) | S.S.+graphite/S.S.+柔性石墨(2) |
| 6 滤网 / Screen | SS304 | SS304 | SS316 |
| 7 阀体 / Body | 1.0619(GS-C25) | 1.4308(CF8) | 1.4408(CF8M) |

(1) On request: other materials

(2) On request: PTFE - other materials

(1) 根据要求可换为其他材质。

(2) 根据要求可换为PTFE等材质。

All data, subject to technical changes, are only for information and not for official use.

温州凯煌阀门有限公司 地址：中国浙江省温州市永嘉县瓯北镇
KWIN VALVE CO.,LTD Add:Oubei town, YongJia county,WenZhou City, ZheJiang province,China Post code:325102
 Phone: +86 577 67162399 Fax:+86 67161399 E-mail:dida_lu@126.com Website: http://ww.kwinvalve.com



凯煌阀门
MANUFACTURER OF VALVES

德标Y型过滤器
DIN Y-STRAINER
DIN PN16-PN25-PN40

FIG. YG01 - STRAINERS-'Y'TYPE DIN PN16-CAST STEEL-F1

| SIZE DN | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | 175 | 200 | 250 | 300 | 350 | 400 | 450 | 500 | 600 |
|---------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|------|------|------|
| L RF | 130 | 150 | 160 | 180 | 200 | 230 | 290 | 310 | 350 | 400 | 480 | 550 | 600 | 730 | 850 | 980 | 1100 | 1200 | 1250 | 1450 |
| D | 95 | 105 | 115 | 140 | 150 | 165 | 185 | 200 | 220 | 250 | 285 | 315 | 340 | 405 | 460 | 520 | 580 | 640 | 715 | 840 |
| H | 70 | 80 | 85 | 100 | 110 | 115 | 130 | 145 | 165 | 185 | 205 | 235 | 250 | 300 | 360 | 410 | 460 | 520 | 570 | -- |
| OPEN | 130 | 144 | 155 | 172 | 200 | 220 | 265 | 290 | 340 | 390 | 440 | 505 | 520 | 680 | 845 | 870 | 1000 | -- | -- | -- |

FIG.YG02 - STRAINERS - 'Y' TYPE DIN PN 25 / 40 - F1

| SIZE DN | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 | 125 | 150 | 175 | 200 | 250 | 300 | 350 | 400 | 450 | 500 | 600 |
|----------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|------|------|------|
| L RF/BW | 130 | 150 | 160 | 180 | 200 | 230 | 290 | 310 | 350 | 400 | 480 | 550 | 600 | 730 | 850 | 980 | 1100 | 1200 | 1250 | 1450 |
| D - PN25 | 95 | 105 | 115 | 140 | 150 | 165 | 185 | 200 | 235 | 270 | 300 | 330 | 360 | 425 | 485 | 555 | 620 | 670 | 730 | 845 |
| D - PN40 | 95 | 105 | 115 | 140 | 150 | 165 | 185 | 200 | 235 | 270 | 300 | 350 | 375 | 450 | 515 | 580 | 660 | 685 | 755 | 890 |
| H | 70 | 80 | 85 | 100 | 110 | 125 | 145 | 160 | 190 | 220 | 250 | 295 | 320 | 385 | 450 | 510 | 585 | 610 | 670 | -- |
| OPEN | 130 | 144 | 155 | 172 | 200 | 230 | 280 | 305 | 365 | 425 | 485 | 565 | 590 | 765 | 935 | 970 | 1125 | -- | -- | -- |

新功能需求 / *features on request*

- SCREEN IN SPECIAL MATERIALS/特殊材质的滤网
- DISCHARGE VALVE/排污阀
- DRAIN PLUG/排污堵头
- BW ENDS/对焊连接法兰
- ANSI CONNECTIONS /美标连接法兰

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.

温州凯煌阀门有限公司 地址：中国浙江省温州市永嘉县瓯北镇
KWIN VALVE CO.,LTD Add:Oubei town, YongJia county,WenZhou City, ZheJiang province,China Post code:325102
 Phone: +86 577 67162399 Fax:+86 67161399 E-mail:dida_lu@126.com Website: http://ww.kwinvalve.com